



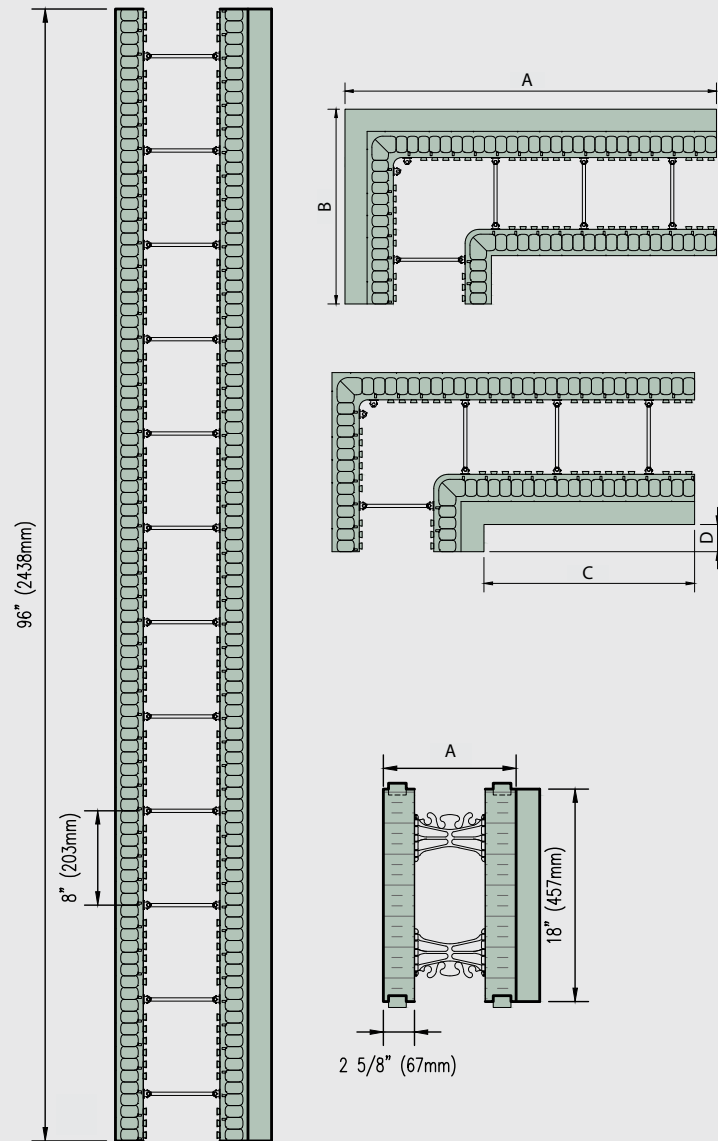

Standard Form Unit (Type 2 EPS Laminate on one side)

Thickness	1" (25 mm)	2" (50 mm)	4" (100 mm)	6" (150 mm)
Length	96" (2438 mm)	96" (2438 mm)	96" (2438 mm)	96" (2438 mm)
Height	18" (457 mm)	18" (457 mm)	18" (457 mm)	18" (457 mm)
Qty./Bundle	3	3	3	3
Code	96-6P1	96-6P2	96-6P4	96-6P6

*Other form units & core thicknesses available through special request.

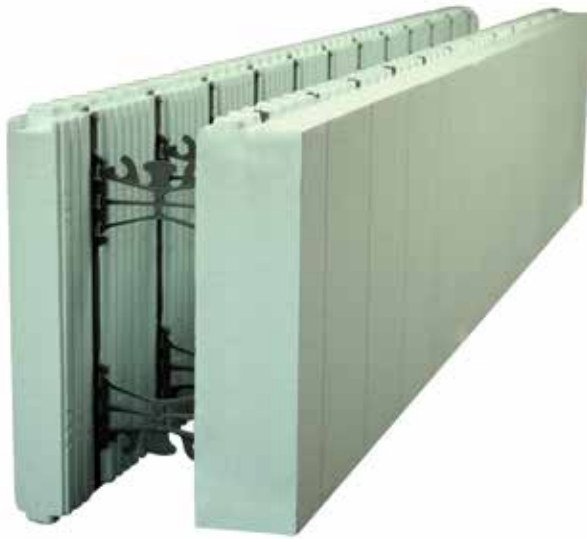

1" (25 mm)
R-value - 28



2" (50 mm)
R-value - 32



4" (100 mm)
R-value - 40



6" (150 mm)
R-value - 48

90° Form Unit - Outside (Long Side) (Type 2 EPS Laminate on one side)


Thickness	1" (25 mm)	2" (50 mm)	4" (100 mm)	6" (150 mm)
Length A	32 3/8" (813 mm)	33 3/8" (854 mm)	35 3/8" (905 mm)	37 3/8" (956 mm)
Length B	16 3/8" (422 mm)	17 3/8" (448 mm)	19 3/8" (498 mm)	21 3/8" (550 mm)
Height	18" (457 mm)	18" (457 mm)	18" (457 mm)	18" (457 mm)
Qty./Bundle	6	6	6	6
Code	906P1L	906P2L	906P4L	906P6L

90° Form Unit - Inside (Short Side) (Type 2 EPS Laminate on one side)


Thickness	1" (25 mm)	2" (50 mm)	4" (100 mm)	6" (150 mm)
Length C	19 3/8" (492 mm)	18 3/8" (467 mm)	16 3/8" (416 mm)	14 3/8" (365 mm)
Length D	3 3/8" (86 mm)	2 3/8" (60 mm)	3/8" (10 mm)	**
Height	18" (457 mm)	18" (457 mm)	18" (457 mm)	18" (457 mm)
Qty./Bundle	6	6	6	6
Code	906P1S	906P2S	906P4S	906P6S

**On-site notching of EPS foam required.

Refer to pages 29-34 for related product accessories & tools.
For additional information visit nudura.com or call 866-468-6299.



2" (50 mm)
R-value - 33
RSI - 5.812
U-value - 0.172

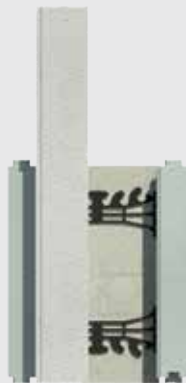

4" (100 mm)
R-value - 40
RSI - 7.045
U-value - 0.142



6" (150 mm)
R-value - 47
RSI - 8.28
U-value - 0.121

6" (150 mm) concrete core R-Value ratings based on exterior brick finish

Build your own R-Value

The NUDURA R-Value Inserts allow the ability to customize the desired amount of insulation needed to meet the specific requirements of any project. The inserts are available in 3 standard sizes: 2" (50 mm), 4" (100 mm) and 6" (150 mm). Custom combinations can be created to provide further insulation value if desired and are compatible with all sizes of forms offered by NUDURA, with core sizes ranging from 4" (100 mm) to 12" (300 mm).

NUDURA Plus Series R-Value Inserts (EPS Foam Billet)			
Thickness	2" (50 mm)	4" (100 mm)	6" (150 mm)
Width	7 1/2" (190 mm)	7 1/2" (190 mm)	7 1/2" (190 mm)
Height	32" (812 mm)	32" (812 mm)	32" (812 mm)
Qty/Bundle	48	24	24
Code	INS-2	INS-4	INS-6